



## Flexbar

- › Modular bar system allowing you to have greater flexibility
- › Configure your dream bar
- › Over 140 modules to choose from
- › Create a unique atmosphere with coloured EQUAL LED lighting
- › Specialist designers create a free bespoke project drawing
- › Easy installation and servicing

# › Gamko Flexbar

modular bar system



## Gamko: the inventors of the modular bar system

In 1979, Gamko introduced an innovative approach to bar construction: the modular bar installation. For the first time it was possible to create the most flexible bar possible using detachable sections, fronts and accessories whilst retaining all the refrigeration technology. Since this time, Gamko has continued to develop this unique variant into what it is today: the Gamko Flexbar with its unrivalled features. Because as the name suggests: flexibility is what counts!

With 60 years of refrigeration expertise, Gamko has and continues to make reliable and high quality, premium, professional drinks coolers. Solid, high-grade, thoroughly tested, flexible, ergonomic and very attractive. Find out about Gamko's Flexbar.

## Features and benefits


### Flexbar configuration

- › Your Bar. Your Way. Our Flexbar allows you to have greater flexibility and choice. With over 140 different modules to choose from, you can create your dream bar!
- › Bar configurations can be designed for areas with limited space, low energy consumption, reduced noise and heat requirements.
- › Modules come in two sizes so your bar is unique to you.
- › Bar fronts available in three designs: anthracite, our most popular finish; ferritic stainless steel for a clean and sleek aesthetic; and glass with white LED lighting, for maximum visual impact.
- › You can create a right-angled bar, a curved bar, a bar with doors on both sides, or a cocktail bar with professional stainless steel accessories or a combination of these.
- › Create ambiance and use your bar as the main attraction with coloured LED lighting combined with glass storage segments (EQUAL LED).
- › Prevent theft with the Central Electronic Locking System (patented CELS).
- › Create a perfectly functioning bar with these handy extras: such as drawers, bottle racks, bottle coolers in the front of the counter top, ambient sections with rinsing racks and waste bins, coffee-waste drawers and stainless steel (cocktail) accessories.
- › Easy to assemble camlock connection, complete with specific installation instructions.
- › Our in-house experts can design your bespoke layout, creating a drawing of the bar design to help you visualise your new bar - free of charge!
- › Now available in R600a hydrocarbon refrigerant



## Safety

Flexbar complies with the most stringent safety requirements. All electrical components in the refrigerated sections work at low voltage (24 volts). In addition, all glazed fronts are fitted with safety glass.

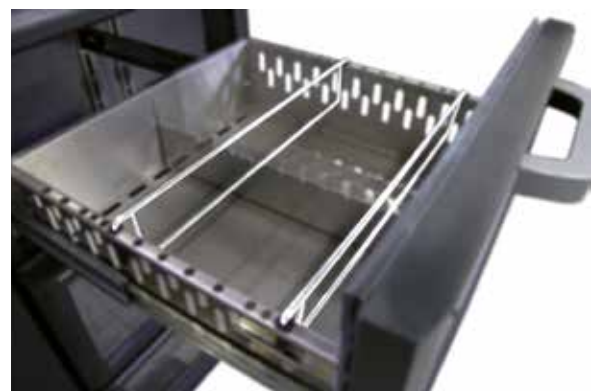



### Easy installation

The Flexbar is fitted as standard with height-adjustable feet, which can be adjusted from the outside. With the camlock system, the detachable sections can be interconnected in situ in no time at all. Flexbar installations have been assembled by local fitters worldwide.

### Ergonomic handle

The sturdy robust, metal handle consists of two components. The aluminium exterior is responsible for the solid build, while the soft touch rubber interior is responsible for excellent grip, even with wet hands.



### White and coloured lighting (EQUAL LED)

As standard all glass sections are supplied with white EQUAL LED lighting. The Flexbar can also be supplied with coloured EQUAL LED lighting. Our lighting provides an even distribution of light. Using the supplied remote control, you can set the entire bar layout to one colour, allow the colour to change automatically, dim the light intensity and allow the colour to change. You can get your Flexbar lighting to time with the music. Lighting is easy to adapt based on the plug & play principle.



### Central Electronic Locking System

The Flexbar can be supplied with a patented and fully integrated with Central Electronic Locking System (CELS). Using the machine unit or evaporator fitted with a lock control, the bar can be fully locked down with one simple action. Straight forward, fast, safe and no section can be overlooked. In addition to the required control on the machine unit or evaporator, each section can be upgraded with its own lock. Locks are easy to adapt based on the plug & play principle.



### Handy, robust drawers

The solid Flexbar drawers are fitted with telescopic steel guides, which ensure that the drawer closes the last few centimetres by itself. Two drawer dividers prevent bottles from falling over when closing or opening. The maximum weight-bearing capacity per drawer is 75 kg. With glass drawers including LED lighting in each drawer front, you can provide a very attractive display for bottled drinks. By leaving the first row of bottles in place when serving, the display always remains beautiful and perfectly intact.



### Removable and flexible bottle rack

For the refrigerated sections, the bottle rack is included inside a drawer. This makes it easy to clean and can also be interchanged with a normal drawer after being installed. In this way, the depth can be adjusted depending on the bottle size.

## A Gamko Flexbar in 4 steps

Putting together the ideal Flexbar may, perhaps, appear to be somewhat complex. Using the 4-step plan below, we will lead you through the many options. Specify your preferences and requirements and Gamko will then help you in designing your dream bar. Our expert team are on hand to answer any questions and use their vast experience to give advice.



STEP 1

### A Gamko Flexbar in 4 steps

#### Select a machine unit or evaporator unit with the correct control system:

- Your design can be plug ready, like your fridge at home, or have the compressor located outside.
- make sure you have the correct control system if you are choosing lighting, locks or a combination of the two.

STEP 2

#### Connect refrigerated sections to the machine unit or to the evaporator unit and finish it with a set of end panels:

- specify your desired refrigerated and ambient storage capacity
- refrigerated sections with door and drawer fronts,
  - made of anthracite steel panels (page 6)
  - made of glass with white or coloured EQUAL LED lighting (page 7)
  - made of ferritic stainless steel (page 8);
- refrigerated sections fitted with bottle rack, bottle bin and Central Electronic Locking System (CELS);
- refrigerated pass-through sections (page 9);
- end panels and in between panels (page 10).

Remember that:

- wherever possible, the machine unit or the evaporator unit is installed centrally between the chilled sections;
- we recommend a maximum of four refrigerated segments measuring 540 mm wide, and a maximum of five measuring 410 mm per machine unit or evaporator unit;
- if you prefer a Flexbar with white or coloured EQUAL LED lighting then choose segments with a glass front.

STEP 3

#### Finish your Flexbar with:

- separate stand alone freezer for creating a different temperature zone (page 11);
- a range of accessories (page 11);
- corner pieces for a curved bar configuration (page 10);
- unrefrigerated sections with or without a front (page 12);
- unrefrigerated drawer sections for rinse racks, coffee or waste bin(s);
- accessories for a cocktail bar (page 13);
- stainless steel counter tops (page 14).

STEP 4

#### Send your sketch and/or wish list to Gamko:

Based on this, Gamko will create a project drawing to provide you with a realistic impression and provide a non-binding quote. We can imagine you may have some questions, you can find our telephone number on the back of this brochure.



## Machine units and evaporator units where applicable with Central Electronic Locking System.

Machine units and evaporator units are the heart of a Flexbar installation. The refrigerated sections are connected to this. To be able to ensure that lighting and/or locks operate centrally, select a type of machine unit or evaporator unit with Central Electronic Locking System (CELS).

Pass-through sections (see also page 9) work with a special machine unit or evaporator unit fitted with a Flexbar front to both sides of the unit



## Flexbar machine units

### XHC/MU or XHC/PTMU

Machine unit with anthracite front. Dimensions (W x D x H): 410 x 589\* x 860/880\*\*mm or 410 x 600 x 860/880 mm\* for pass-through sections.



MACHINE UNIT (& ELECTR. CONNECTION)	PRODUCT CODE	PRODUCT CODE IF PASS-THROUGH
standard machine unit	XHC/MU	XHC/PTMU
+ white light	XHC/MU-G	XHC/PTMU-G
+ coloured light	XHC/MU-GC	XHC/PTMU-G
+ CELS lock system	XHC/MU-K	XHC/PTMU-K
+ CELS lock system & white light	XHC/MU-G-K	XHC/PTMU-G-K
+ CELS lock system & coloured light	XHC/MU-GC-K	XHC/PTMU-G-K

### XHC/MUS or XHC/PTMUS

Machine unit with ferritic stainless steel front. Dimensions (W x D x H): 410 x 589\* x 860/880\*\*mm



MACHINE UNIT (& ELECTR. CONNECTION)	PRODUCT CODE	PRODUCT CODE IF PASS-THROUGH
standard machine unit	XHC/MUS	XHC/PTMUS
+ white light	XHC/MUS-G	XHC/PTMUS-G
+ coloured light	XHC/MUS-GC	XHC/PTMUS-GC
+ CELS lock system	XHC/MUS-K	XHC/PTMUS-K
+ CELS lock system & white light	XHC/MUS-G-K	XHC/PTMUS-G-K
+ CELS lock system & coloured light	XHC/MUS-GC-K	XHC/PTMUS-GC-K

### XHC/1M

Machine unit fitted with coffee fold out drawer. Anthracite front. Dimensions (W x D x H): 540 x 589\* x 860/880\*\*mm



MACHINE UNIT (& ELECTR. CONNECTION)	PRODUCT CODE
standard machine unit	XHC/1M
+ white light	XHC/1M-G
+ coloured light	XHC/1M-GC
+ CELS lock system	XHC/1M-K
+ CELS lock system & white light	XHC/1M-G-K
+ CELS lock system & coloured light	XHC/1M-GC-K

## General Specifications Flexbar machine unit & evaporator units

- Machine unit power consumption max. 536W / evaporator units max. 80W
- Easy to maintain and service-friendly
- Prepared for python tubing
- Height-adjustable legs
- Option: transformer for locks and/or lighting
- Option: machine control panel on the front and rear (for pass-through sections)
- Automatic defrost
- Electronic thermostat with digital display
- Temperature: +4° C / +8° C
- Adjustable temperature range from +2° C to +18° C
- Plug ready models available in R600a hydrocarbon refrigerant as standard



## Flexbar evaporator units (split design)

### X/VS20 or X/PTVS20

Anthracite front(s). Dimensions (W x D x H): 200 x 589\* x 860/880\*\*mm or 200 x 600 x 860/880 mm\* for pass-through sections. Supplied with R134a valve as standard. Other valves available on request.



EVAPORATOR UNIT (& ELECTR. CONNECTION)	PRODUCT CODE	PRODUCT CODE IF PASS-THROUGH
standard evaporator unit	X/VS20	X/PTVS20
+ white light	X/VS20-G	X/PTVS20-G
+ coloured light	X/VS20-GC	X/PTVS20-GC
+ CELS lock system	X/VS20-K	X/PTVS20-K
+ CELS lock system & white light	X/VS20-G-K	X/PTVS20-G-K
+ CELS lock system & coloured light	X/VS20-GC-K	X/PTVS20-GC-K

### X/VSS20 or X/PTVSS20

Front made of ferritic stainless steel. Dimensions (W x D x H): 200 x 589\* x 860/880\*\*mm



EVAPORATOR UNIT (& ELECTR. CONNECTION)	PRODUCT CODE	PRODUCT CODE IF PASS-THROUGH
standard evaporator unit	X/VSS20	X/PTVSS20
+ white light	X/VSS20-G	X/PTVSS20-G
+ coloured light	X/VSS20-GC	X/PTVSS20-GC
+ CELS lock system	X/VSS20-K	X/PTVSS20-K
+ CELS lock system & white light	X/VSS20-G-K	X/PTVSS20-G-K
+ CELS lock system & coloured light	X/VSS20-GC-K	X/PTVSS20-GC-K

\* Depth of the cabinet is excluding handgrip, including power supply connection. During installation: add 40mm to the overall depth (in conjunction with the appliance's plug) and add 10 mm to the total width.

\*\* Height 860-880 mm (height 840 mm without legs)



## Refrigerated segments with anthracite front

Refrigerated segments with an anthracite front are available in the variants set out below and in two width dimensions: 410 mm and 540 mm.

## General specifications

- Refrigerates in combination with machine unit / evaporator unit (page 5)
- Available with door, drawers and bottle rack with drawer
- As standard, two adjustable shelves with segments supplied with door
- Height-adjustable feet from inside
- Available in width dimensions: 410 mm and 540 mm
- Depth and height standard for each section: 589\*\* x 860/880\*\*\*mm
- Option: CELS lock system

Illustrated segments 540mm in width. Also available in width of 410mm.



## Item numbers and specific features of refrigerated segments with solid anthracite front

LAYOUT SEGMENTS	WIDTH	PRODUCT CODE	CODE WITH LOCK	BOTTLE STORAGE CAPACITY	KEG STORAGE CAPACITY	
	left hinged door	540 mm	X/2LA54	X/2LA54K	189 x 330 ml / 58 x 1-1.5 L*	3 x 20 L / 1x 30-50 L
	left hinged door	410 mm	X/2LA41	X/2LA41K	147 x 330 ml / 40 x 1-1.5 L*	2 x 20 L
	right hinged door	540 mm	X/2RA54	X/2RA54K	189 x 330 ml / 58 x 1-1.5 L*	3 x 20 L / 1x 30-50 L
	right hinged door	410 mm	X/2RA41	X/2RA41K	147 x 330 ml / 40 x 1-1.5 L*	2 x 20 L
	2 x 1/2 drawers	540 mm	X/3DA54	X/3DA54K	98 x 330 ml / 40 x 1-1.5 L*	-
	2 x 1/2 drawers	410 mm	X/3DA41	X/3DA41K	68 x 330 ml / 30 x 1-1.5 L*	-
	bottle rack & 1/2 drawer	540 mm	X/3DHBA54	X/3DHBA54K	49 x 330 ml & 8 x 1-1.5 L* / 28 x 1-1.5 L*	-
	bottle rack & 1/2 drawer	410 mm	X/3DHBA41	X/3DHBA41K	34 x 330 ml & 6 x 1-1.5 L* / 21 x 1-1.5 L*	-
	5/12 drawer & 7/12 drawer	540 mm	X/5DA54	X/5DA54K	98 x 330 ml / 40 x 1-1.5 L*	-
	5/12 drawer & 7/12 drawer	410 mm	X/5DA41	X/5DA41K	68 x 330 ml / 30 x 1-1.5 L*	-
	3 x 1/3 drawer	540 mm	X/6DA54	X/6DA54K	147 x 330 ml*	-
	3 x 1/3 drawer	410 mm	X/6DA41	X/6DA41K	102 x 330 ml*	-
	bottle rack & 2 x 1/3 drawer	540 mm	X/6DHBA54	X/6DHBA54K	98 x 330 ml & 4 x 1-1.5 L*	-
	bottle rack & 2 x 1/3 drawer	410 mm	X/6DHBA41	X/6DHBA41K	68 x 330 ml & 3 x 1-1.5 L*	-
	1/3 drawer & 2/3 drawer	540 mm	X/7DA54	X/7DA54K	98 x 330 ml / 49 x 330 ml & 20 x 1-1.5 L*	1 x 30 L
	1/3 drawer & 2/3 drawer	410 mm	X/7DA41	X/7DA41K	68 x 330 ml / 34 x 330 ml & 15 x 1-1.5 L*	-

\* 330 ml bottle is Ø 60mm, 1-1.5 l bottle is Ø 88mm. Capacity also depends on the bottle height.

\*\* Depth of the cabinet is excluding handgrip, including power supply connection. During installation: add 40mm to the overall depth (in conjunction with the appliance's plug) and add 10 mm to the total width.

\*\*\* Height 860-880 mm (840 mm without legs)

**STEP 2**

## Refrigerated segments with glazed front

Refrigerated segments with a glazed front are available in the variants set out below and in two width dimensions: 410 mm and 540 mm.

## General specifications

- › Refrigerates in combination with machine unit / evaporator unit (page 5)
- › As standard, designed with energy-saving, white EQUAL LED lighting: 1 for each drawer and 2 per door (excludes control system)
- › Anthracite coloured frame around fronts
- › Safety glass
- › Available with door or drawers
- › As standard, two adjustable shelves with section supplied with door
- › Height-adjustable feet from inside
- › Available in width dimensions: 410 mm and 540 mm
- › Depth and height standard for each section: 589\*\* x 860/880 mm
- › Option: coloured EQUAL LED lighting
- › Option: Central Electronic Locking System (CELS)



Illustrated segments 540 mm in width. Also available in width of 410 mm.

## Item numbers and specific features of refrigerated segments with glazed front

LAYOUT SEGMENTS	WIDTH	PRODUCT CODE WHITE LIGHTING	PRODUCT CODE COLOURED LIGHTING	CODE WHITE LIGHTING & CELS	CODE COLOURED LIGHTING & LOCK	STORAGE CAPACITY BOTTLES	STORAGE CAPACITY KEGS	
	left hinged door	540 mm	X/2LG54	X/2LGC54	X/2LG54K	X/2LGC54K	189 x 330 ml / 58 x 1-1.5 L*	3 x 20 L / 1 x 30-50 L
	left hinged door	410 mm	X/2LG41	X/2LGC41	X/2LG41K	X/2LGC41K	147 x 330 ml / 40 x 1-1.5 L*	2 x 20 L
	right hinged door	540 mm	X/2RG54	X/2RGC54	X/2RG54K	X/2RGC54K	189 x 330 ml / 58 x 1-1.5 L*	3 x 20 L / 1 x 30-50 L
	right hinged door	410 mm	X/2RG41	X/2RGC41	X/2RG41K	X/2RGC41K	147 x 330 ml / 40 x 1-1.5 L*	2 x 20 L
	2 x 1/2 drawers	540 mm	X/3DG54	X/3DGC54	X/3DG54K	X/3DGC54K	98 x 330 ml / 40 x 1-1.5 L*	-
	2 x 1/2 drawers	410 mm	X/3DG41	X/3DGC41	X/3DG41K	X/3DGC41K	68 x 330 ml / 30 x 1-1.5 L*	-
	5/12 drawer & 7/12 drawer	540 mm	X/5DG54	X/5DGC54	X/5DG54K	X/5DGC54K	98 x 330 ml / 40 x 1-1.5 L*	-
	5/12 drawer & 7/12 drawer	410 mm	X/5DG41	X/5DGC41	X/5DG41K	X/5DGC41K	68 x 330 ml / 30 x 1-1.5 L*	-
	3 x 1/3 drawer	540 mm	X/6DG54	X/6DGC54	X/6DG54K	X/6DGC54K	147 x 330 ml*	-
	3 x 1/3 drawer	410 mm	X/6DG41	X/6DGC41	X/6DG41K	X/6DGC41K	102 x 330 ml*	-

\* 330 ml bottle is Ø 60 mm, 1-1.5 l bottle is Ø 88 mm. Capacity also depends on the bottle height.

\*\* Depth of the cabinet is excluding handgrip, including power supply connection. During installation: add 40 mm to the overall depth (in conjunction with the appliance's plug) and add 10 mm to the total width.



## Refrigerated segments with stainless steel front

Refrigerated segments with a ferritic stainless steel front are available in the variants set out below and in two width dimensions: 410 mm and 540 mm.

## General specifications

- Stainless steel with anti-fingerprint coating
- Ferritic material with equal corrosion resistance as AISI 304
- Hygienic, easy to clean and maintain
- Stainless steel is 100% recyclable
- Refrigerates in combination with machine unit / evaporator unit (page 5)
- Available with door or drawers
- As standard, two adjustable shelves supplied with door
- Height-adjustable feet from inside
- Depth and height standard for each section: 589\*\* x 860/880 mm
- Option: Central Electronic Locking System (CELS)



Illustrated segments 540 mm in width. Also available in width of 410 mm.

## Item numbers and specific features of door and drawer sections with solid ferritic stainless steel front

LAYOUT SOLID SEGMENTS	WIDTH	PRODUCT CODE	CODE WITH LOCK	BOTTLE STORAGE CAPACITY	KEG STORAGE CAPACITY	
	left hinged door	540 mm	X/2LS54	X/2LS54K	189 x 330 ml / 58 x 1-1.5 L*	3 x 20 L / 1x 30-50 L
	left hinged door	410 mm	X/2LS41	X/2LS41K	147 x 330 ml / 40 x 1-1.5 L*	2 x 20 L
	right hinged door	540 mm	X/2RS54	X/2RS54K	189 x 330 ml / 58 x 1-1.5 L*	3 x 20 L / 1x 30-50 L
	right hinged door	410 mm	X/2RS41	X/2RS41K	147 x 330 ml / 40 x 1-1.5 L*	2 x 20 L
	2 x 1/2 drawer	540 mm	X/3DS54	X/3DS54K	98 x 330 ml / 40 x 1-1.5 L*	-
	2 x 1/2 drawer	410 mm	X/3DS41	X/3DS41K	68 x 330 ml / 30 x 1-1.5 L*	-
	5/12 drawer & 7/12 drawer	540 mm	X/5DS54	X/5DS54K	98 x 330 ml / 40 x 1-1.5 L*	-
	5/12 drawer & 7/12 drawer	410 mm	X/5DS41	X/5DS41K	68 x 330 ml / 30 x 1-1.5 L*	-
	3 x 1/3 drawer	540 mm	X/6DS54	X/6DS54K	147 x 330 ml*	-
	3 x 1/3 drawer	410 mm	X/6DS41	X/6DS41K	102 x 330 ml*	-

## Item numbers and specific features of door sections with glass ferritic stainless steel front

LAYOUT GLASS SEGMENTS	WIDTH	PRODUCT CODE WHITE LIGHTING	CODE COLOURED LIGHTING	CODE WHITE LIGHTING & CELS	CODE COLOURED LIGHTING & CELS	BOTTLE STORAGE CAPACITY	KEG STORAGE CAPACITY	
	left hinged door	540 mm	X/2LSG54	X/2LSGC54	X/2LSG54K	X/2LSGC54K	189 x 330 ml / 58 x 1-1.5 L*	3 x 20 L / 1x 30-50 L
	left hinged door	410 mm	X/2LSG41	X/2LSGC41	X/2LSG41K	X/2LSGC41K	147 x 330 ml / 40 x 1-1.5 L*	2 x 20 L
	right hinged door	540 mm	X/2RSG54	X/2RSGC54	X/2RSG54K	X/2RSGC54K	189 x 330 ml / 58 x 1-1.5 L*	3 x 20 L / 1x 30-50 L
	right hinged door	410 mm	X/2RSG41	X/2RSGC41	X/2RSG41K	X/2RSGC41K	147 x 330 ml / 40 x 1-1.5 L*	2 x 20 L

\* 330 ml bottle is Ø 60mm, 1-1.5 l bottle is Ø 88mm. Capacity also depends on the bottle height.

\*\* Depth of the cabinet is excluding handgrip, including power supply connection. During installation: add 40mm to the overall depth (in conjunction with the appliance's plug) and add 10 mm to the total width.





**STEP 2**

## Refrigerated pass-through segments (door on both sides)

Refrigerated pass-through segments are available in five door combinations and in two width dimensions: 410 mm and 540 mm.

## General specifications of pass-through segments

- Refrigerates in combination with machine unit / evaporator unit (page 5)
- Works combined with special machine unit / evaporator unit fitted with double front
- Glazed front designed as standard with white EQUAL LED lighting (excl. control system)
- Available in width dimensions: 410 mm and 540 mm
- As standard two adjustable shelves supplied per segment
- Height-adjustable feet from inside
- Depth and height standard for each section: 600 x 860/880 mm (deeper than standard sections)
- Option: coloured EQUAL LED lighting
- Option: Central Electronic Locking System (CELS)



The Gamko Flexbar can be assembled using pass-through segments. There is a door on the refrigerated segments on both the front and the rear. The associated machine unit / evaporator unit is also fitted with 2 fronts (see page 5). The advantage of pass-through segments is that the bar can be served from 2 sides. This means that the bar is used more creatively and functionally. Take for example:

- an additional bar installation between the front bar and back bar. Products can be viewed and taken out from 2 sides;
- a front bar, which displays drinks at the front that can easily be taken out by staff walking round serving customers. Drinks can be replenished from behind the bar based on the first in-first out principle;
- a back bar, which can be opened at the back into an adjoining coldroom at the rear. Chilled drinks can be replenished directly via the coldroom;
- a bar installation with glass doors to the front and solid doors to the rear.

## Item numbers and specific features of refrigerated pass-through segments

	FRONT COMBINATION	WIDTH PASS-THROUGH SECTION	LED LIGHTING	CODE PASS-THROUGH SECTION **	ITEM NO. DOOR 1	ITEM NO. DOOR 2
	anthracite-anthracite	540 mm	-	X/PTS54S	X/FRONTRA54	X/FRONTLA54
	anthracite-anthracite	410 mm	-	X/PTS41S	X/FRONTRA41	X/FRONTLA41
	anthracite-glass	540 mm	white	X/PTS54G	X/FRONTRA54	X/FRONTLG54
	anthracite-glass	410 mm	white	X/PTS41G	X/FRONTRA41	X/FRONTLG41
	anthracite-glass	540 mm	coloured	X/PTS54GC	X/FRONTRA54	X/FRONTLG54
	anthracite-glass	410 mm	coloured	X/PTS41GC	X/FRONTRA41	X/FRONTLG41
	glass-glass	540 mm	white	X/PTG54G	X/FRONTRG54	X/FRONTLG54
	glass-glass	410 mm	white	X/PTG41G	X/FRONTRG41	X/FRONTLG41
	glass-glass	540 mm	coloured	X/PTGC54GC	X/FRONTRG54	X/FRONTLG54
	glass-glass	410 mm	coloured	X/PTGC41GC	X/FRONTRG41	X/FRONTLG41

For pass-through machine units and split arrangements, please go to page 5

\*\* Option with Central Electronic Locking System (CELS) on request.

STEP 2

## End panels and in-between panels



### End panels

End panels are necessary for both insulation and completion of your Flexbar. Therefore, refrigerated configurations always start and end with a 40 mm insulated end panel. If you have limited space, we recommend using the 20 mm thick insulated end panel instead. End panels are available in two designs: anthracite and stainless steel.



### In-between panels

In between panels are used to create a barrier between connected segments. An insulated in between panel must be used to create separated temperature zones, whereas a non-insulated panel is used to separate equal temperature zones from one another, for example: when using multiple machine units in one bar.

PANEL TYPE	COLOUR	PRODUCT CODE
End panel refrigerated sections, 40 mm thick insulation (2x)	anthracite	X/EPA04 (set)
End panel refrigerated sections, 40 mm thick insulation (2x)	stainless steel	X/EPC04 (set)
End panel refrigerated sections, 20 mm thick insulation (2x)	anthracite	X/EPA02 (set)
End panel refrigerated sections, 20 mm thick insulation (2x)	stainless steel	X/EPC02 (set)
End panel for ambient sections (2x)	anthracite	X/EPA00 (set)
End panel for ambient sections (2x)	stainless steel	X/EPC00 (set)
In between panel insulated (1x)	silver-grey	X/TP02
In between panel non-insulated (1x)	stainless steel	X/TPC00
In between panel, insulated	silver-grey	X/TP04

STEP 3

## Corner pieces for a curved bar

Gamko also manufactures and supplies special corner pieces used when building a round or curved Flexbar configuration. These insulated corner pieces allow the cold air through and are precisely custom-made to the desired radius (product code: X/CURVE). Given the accuracy required for such a configuration, this is exclusively a custom application.



STEP 3

## Separate freezer (stand-alone)

Easily create a separate temperature zone within the bar installation.

## General characteristics

- › Plug and go!
- › Featuring an award winning +stayclear condenser in its efficient and powerful cooling system
- › Electronic thermostat with digital display
- › Automatic defrost
- › Condensation prevention system on all models
- › LED light on all models
- › Adjustable feet
- › Replaceable door seals
- › Temperature range: -14° C / -10° C



Coloured EQUAL LED possibilities

A Flexbar installation can be expanded with a separate freezer. These stand-alone sections have their own machine unit and are therefore plug ready. With this separate freezer you can easily create a separate temperature zone within the bar installation. The freezer can be supplied with glazed fronts fitted with an anthracite-coloured frame or with a solid anthracite front.

OPTION	CODE GLAZED FRONT & WHITE LIGHTING	CODE GLAZED FRONT & COLOURED LIGHTING	CODE SOLID ANTHRACITE FRONT & WHITE LIGHTING
Freezer, left-hinged door	XF/100LG	XF/100LGC	XF/100LS
Freezer, right-hinged door	XF/100RG	XF/100RGC	XF/100RS

\* Transformer is needed for EQUAL LED.

## 2-zone Flexbar

From now on your customer can enjoy the benefits of dual temperature zones, essential flexibility when space is limited. The new feature creates two separate temperature zones making them perfect for storing a range of both beer/soft drinks and wine. For example you can choose one temperature for red wine and another for white, or one temperature for craft beers and another for light beers.



DESCRIPTION	PRODUCT CODE
Insulated panel with duo-system, left	X/TP2TEMP-L
Insulated panel with duo-system, right	X/TP2TEMP-R



STEP 3

## Extra standard accessories

Door segments are fitted as standard with 2 shelves. Drawer segments are fitted with 2 drawer dividers per drawer as standard, and divide the drawer widthways. Additional shelves with or without upstand, drawer dividers, and a reinforced floor for if you are loading kegs, can all be ordered separately.

ACCESSORIES	PRODUCT CODE
Shelf for 540 mm section	X/ACSH54
Shelf for 410 mm section	X/ACSH41
Wire mesh shelf for separate cooler/freezer X/S	004010405
Shelf brackets/mesh brackets (4 per shelf required)	013010001
Shelf upstand (at sides)	X/ACSB
Drawer divider for 540 mm section (divide the drawer widthways)	X/ACDD54
Drawer divider for 410 mm section (divide the drawer widthways)	X/ACDD41
Reinforced keg floor for 540 mm section	X/ACKR54
Reinforced keg floor for 410 mm section	X/ACKR41

## Ambient segments

Make the Flexbar complete with non-refrigerated, ambient segments. Ideal for storing waste bins and rinser racks, for instance, out of view.



## General characteristics

- > Segments for ambient storage
- > Can be supplied with rinser racks, waste bins, speed rails and other cocktail accessories
- > Can be supplied with and without fronts and with drawers
- > In two designs: anthracite or ferritic stainless steel
- > Available in width dimensions: 410 mm and 540 mm (depending on the design)
- > Height-adjustable feet from inside
- > Depth and height standard for each section: 589 x 860/880 mm\*\*



## Item numbers and specific features of ambient sections

LAYOUT SEGMENTS	WIDTH	COLOUR	PRODUCT CODE	STORAGE CAPACITY BOTTLE	STORAGE CAPACITY KEG	CODE FOR SEGMENTS WITH DOOR / CODE WASTE BINS	
A	open front with 2 shelves	540 mm	anthracite	X/0S54	189 x 330 ml / 58 x 1-1.5 L*	3 x 20 L / 1x 30-50 L	door anthracite: X/PLS54 door stainless steel: X/PLS54S
	open front with 2 shelves	410 mm	anthracite	X/0S41	147 x 330 ml / 40 x 1-1.5 L*	2 x 20 L	door anthracite: X/PLS41 door stainless steel: X/PLS41S
B	open front with 3 drawers for rinser racks 500 x 500mm	540 mm	anthracite	X/0DISH50	-	-	-
C	1/2 drawer	540 mm	anthracite	X/2DA54	-	-	Waste bin: X/ACWB54M or X/ACWB54L or X/ACWB54XL
	1/2 drawer	410 mm	anthracite	X/2DA41	-	-	Waste bin: X/ACWB41M or X/ACWB41L or X/ACWB41XL
C	1/2 drawer	540 mm	stainless steel	X/2DS54	-	-	-
	1/2 drawer	410 mm	stainless steel	X/2DS41	-	-	-
	3 x 1/2 drawer	410 mm	anthracite	X/6DMA	68 x 330 ml	-	-
	3 x 1/2 drawer	410 mm	stainless steel	X/6DMS	68 x 330 ml	-	-
	1 x 1 1/2 drawer and 1 x 1/2 drawer	410 mm	anthracite	X/7DMA	68 x 330 ml or 15 x 1 L	-	Waste bin: X/ACWB41M
	1 x 1 1/2 drawer and 1 x 1/2 drawer	410 mm	stainless steel	X/7DMS	68 x 330 ml or 15 x 1 L	-	Waste bin: X/ACWB41M
	3x 1/2 drawer with heating kit for coffee cups	-	anthracite	X/6DA41-HEAT	-	-	-
	3x 1/2 drawer with heating kit for coffee cups	-	stainless steel	X/6DS41-HEAT	-	-	-

\* Depth of the cabinet is excluding handgrip, including power supply connection. During installation: add 40mm to the overall depth (in conjunction with the appliance's plug) and add 10 mm to the total width.



**STEP 3**

## Accessories for a cocktail bar

In addition to the refrigerated segments and ambient segments, Gamko also supplies a range of professional stainless steel accessories to make a bar a professional cocktail bar.



### Accessories for a cocktail bar

	COCKTAIL ACCESSORIES	PRODUCT CODE	DIMENSIONS EXTERNAL W x D x H	DIMENSIONS INTERNAL W x D x H	DIMENSIONS FLUSH-MOUNTED W x D
<b>D</b>	insulated s/steel bin, flush-mounted with drain, 540 mm section	X/ACIICE54	434 x 434 x 296 mm	344 x 344 x 244 mm	415 x 415 mm
	insulated s/steel bin, flush-mounted with drain, 410 mm section	X/ACIICE41	304 x 434 x 296 mm	214 x 344 x 244 mm	285 x 415 mm
<b>E</b>	speed rail for single 540 mm segment	X/ACSP54	540 x 134 x 250/90 mm		
	speed rail for single 410 mm segment	X/ACSP41	410 x 134 x 250/90 mm		
	speed rail for double 540 mm segment	X/ACSP108	1080 x 134 x 250/90mm		
	speed rail for double 410 mm segment	X/ACSP82	820 x 134 x 250/90mm		
<b>F</b>	XL speed rail for single 540 mm segment	X/ACSPXL54	540 x 253 x 250/25 mm		
	XL speed rail for single 410 mm segment	X/ACSPXL41	410 x 253 x 250/25 mm		
<b>G</b>	bottle divider for X/ACIICE	X/ACBD			
	slide top cover for X/ACIICE54	X/ACST54			
	slide top cover for X/ACIICE41	X/ACST41			
<b>H</b>	bottle rack for X/ACIICE54	X/ACBB54			
	bottle rack for X/ACIICE41	X/ACBB41			
<b>I</b>	rack for gastro 1/6 (bins included)	X/ACTRAY			
	bottle opener	000030121			
	storage bin for caps	264610A31			



**STEP 3**

## stainless steel waste bins for ambient segments

WASTE BIN CONTAINER OPTIONS (W x D x H)	PRODUCT CODE
1 Waste bin measuring 400 x 410 x 420 mm/69 litres	X/ACWB54M
1 Waste bin measuring 400 x 410 x 690 mm/113 litres	X/ACWB54XL
1 Waste bin measuring 270 x 410 x 420 mm/46 litres	X/ACWB41M
1 Waste bin measuring 270 x 410 x 690 mm/76 litres	X/ACWB41XL

Waste bins can be used in X/2D and X/7D drawer segments.

## STEP 3

### Stainless steel bar tops

Gamko supplies AISI 304 stainless steel bar tops to suit the design of the bar. The stainless steel bar tops can be fitted with a drip tray and with upstand.

### General features

- > Seamless
- > Curves achieved for circular bars
- > Bottom reinforced with wood

### Total Bar Solutions

Our successful projects across the globe have given us the deserved reputation of being the expert in total bar solutions. Working with you, we can design a complete bar to aid the success of your business and set you apart from your competitors.

Our total bar solutions start with a full analysis of your requirements, and follow through to installation and completion onsite, as well as aftercare. We can advise you on the equipment you will need, the functionality, look and feel of the bar, and how to make it as energy efficient as possible, without compromising on the quality.



### EQUAL LED lighting

On many bar locations the customer has got a view of the back bar. By using the white and coloured EQUAL LED lighting in combination with the glass storage segments you will create a perfect and special atmosphere.



### Front Bar


The service side of the bar is ideal to equip with a professional cocktail station which can be assembled with a large range of cocktail accessories to achieve a professional workplace for the employees.



When you contact us in the very initial phase of a project we are able to assist you in this process. For more information you can check the website [www.gamko.com](http://www.gamko.com) or contact us by email or phone.

## STEP 4

### Send your sketch and/or wish list to Gamko

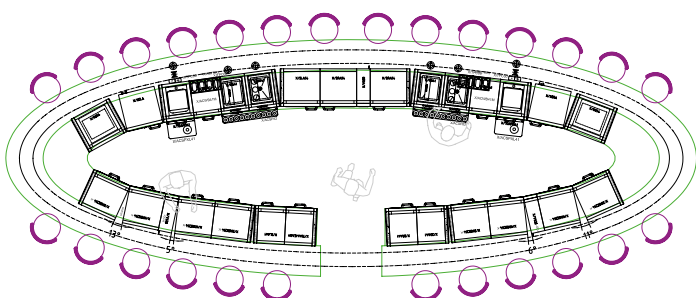

Contact us and arrange for your idea, wish list or rough sketch to be professionally drawn up by our project team without obligation and free of charge. In this you can be sure that you aren't forgetting anything and all of your ideas can be implemented down to the last detail. We imagine that you may first have some questions. Call us for help from one of our advisers. Don't hesitate to ask for the Flexbar check list. You can make a list of all your preferences and requirements yourself or do so in consultation with Gamko.

### Gamko UK

T 01553 780336

E [info@gamko.co.uk](mailto:info@gamko.co.uk)


### Gamko Worldwide

T +44 (0)1553 780 515


E [export@gamko.com](mailto:export@gamko.com)

**FLEXBAR 410 mm SECTIONS**

Drawer section - per drawer

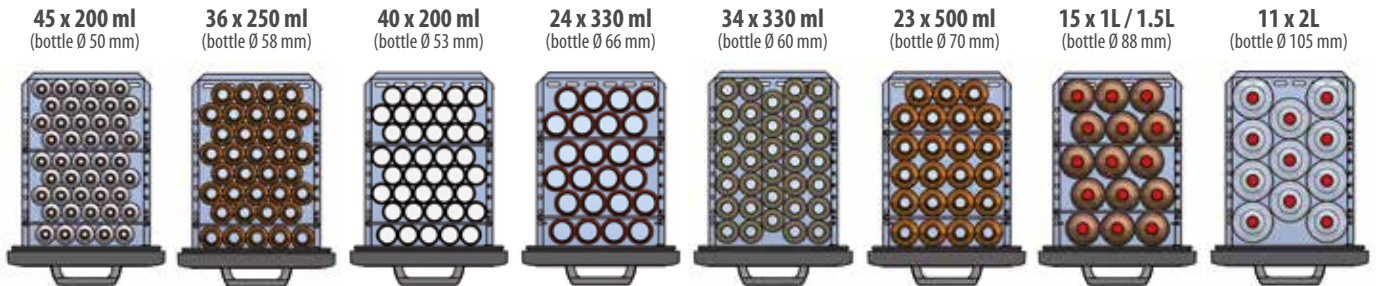


Door section - per shelf

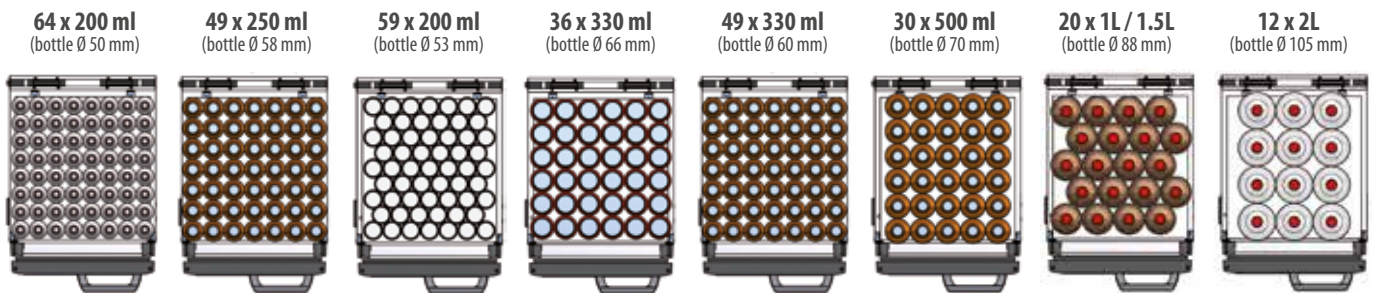


**FLEXBAR 540 mm SECTIONS**

Drawer section - per drawer

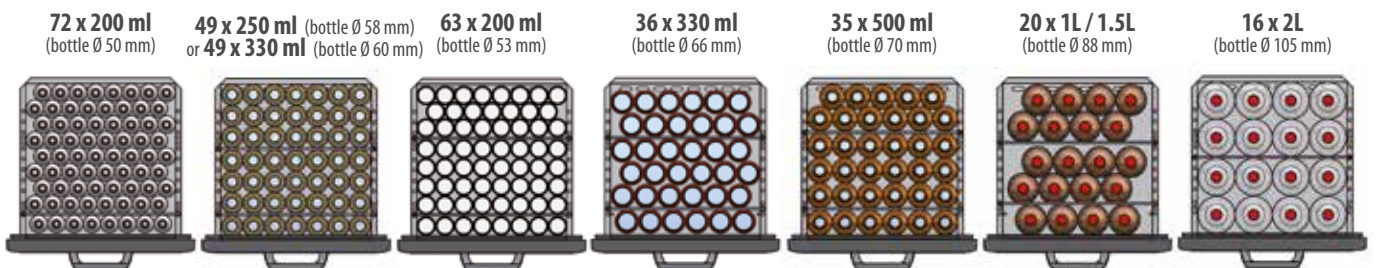

Door section - per shelf

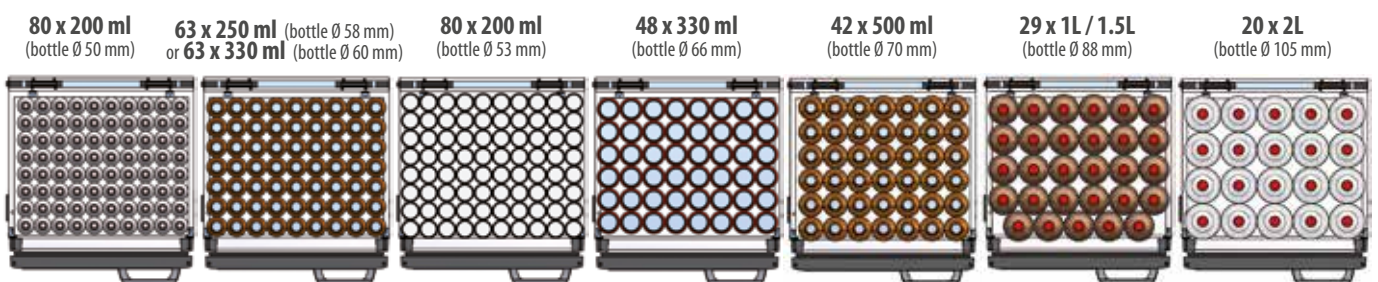



## Experts in professional drinks cooling

Gamko are global leaders in the manufacture of professional drinks coolers for the bar, leisure and catering industries.

With 60 years of drinks cooling expertise, Gamko has the knowledge and experience to offer you the best solutions. We are proud to design, manufacture and supply our impressive range of drinks cooling solutions tailored to meet the changing needs of our customers.

Gamko was established in 1958, and since then we have revolutionised the professional drinks cooling industry. Gamko products encompass our unique blend of innovative spirit and precision engineering.

We work to ensure our product range is as flexible as our customers need, adapting to changing markets, and working in partnership with customers to exceed their expectations.

Gamko has a worldwide network of dealers and agents, and offices in Benelux, the United Kingdom and France.

Each customer is unique, each bar is unique and each Gamko product provides a unique stylish solution, seamlessly complementing the look and feel of any bar.

## Gamko manufactures and supplies

- › Flexbar: modular (cocktail) bar system with unlimited options
- › E3: bottle coolers with glass doors, solid doors and drawers
- › Maxiglass: bottle coolers with glass and solid doors
- › Keg or crate coolers
- › Counter top coolers and freezers
- › Glass frosters
- › Waste disposal coolers

For the most up-to-date information, visit [gamko.com](http://gamko.com)

No rights can be derived from the information as shown in this brochure. Changes in content, technology and prices reserved. 01/2019

